




Recommended Wheel Position



Features

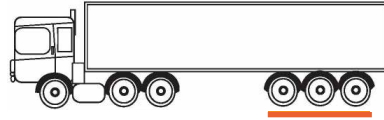

Long Haul Application



Enhanced Mileage



Optimized Handling



Multiple Retreads

CT519T : Trailer Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142M	14	TL	(S)2800/6175 (D)2650/5840	720/105	8.25	1054	279	10.32
295/75R22.5	144/141L	14	TL	(S)2800/6175 (D)2575/5675	760/110	9.00	1014	298	10.32
11R24.5	146/143L	14	TL	(S)3000/6615 (D)2725/6005	720/105	8.25	1104	279	10.32
285/75R24.5	144/141L	14	TL	(S)2800/6175 (D)2575/5675	760/110	8.25	1049	282	10.32

- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and breaking performance in wet and dry conditions
- Advanced construction and compound design for high speed and long distance performance
- Strengthened casing for more retreads