




Recommended Wheel Position



Features

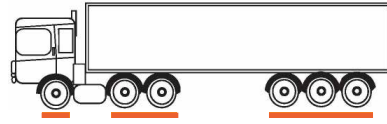

Long Haul Application



Enhanced Mileage



Optimized Handling



Multiple Retreads

CT520+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
385/65R22.5 (E)	164K	20	TL	(S)4250/9370 (4500/9921)	830/120	11.75	1080	380	15.5

- 6 rib tread design with wide shoulders for excellent handling stability and resistance to uneven wear
- 5 circumferential wave grooves provide more evacuation capability creating efficient performance in wet and dry conditions
- Specialized compounds offer low rolling resistance and longer mileage
- Strengthened casing for multiple retreads

(E) EU Certified