




Recommended Wheel Position



Features

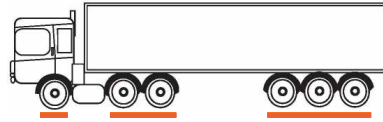

Long Haul Application



Enhanced Mileage



Optimized Handling



Multiple Retreads

CT566+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
285/75R24.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/110	8.25	1049	283	14.3

- Combination rib and lug pattern provides high traction and superior resistance to irregular wear
- 4 grooves for excellent performance on wet, dry or snowy roads
- Advanced tread design with low heat generation for long distance performance
- Strengthened casing for more retreads