




Recommended Wheel Position



Features

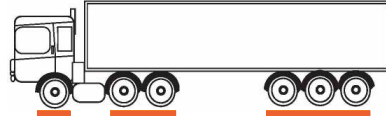

Regional Application



Enhanced Mileage



Optimized Handling



Multiple Retreads

CT603+ : On/Off Road All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
12.00R20	154/151K	18	TT	(S) 3750/8270 (D) 3450/7610	830/120	8.50	1118	305	18.5
12.00R24	160/157K	20	TT	(S) 4500/9920 (D) 4125/9090	900/131	8.50	1225	310	19.1

- Big block pattern and solid shoulder design for excellent handling stability and superior resistance to irregular wear
- 3 zigzag grooves for excellent grip performance on wet, dry or snowy roads
- Advanced compound with low heat generation for increased durability
- Strengthened casing for more retreads