




Recommended Wheel Position



Features

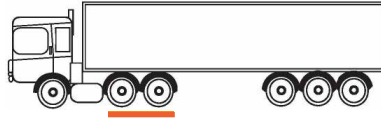

Off Road Application



Enhanced Mileage



Chip Resistant



Extra Traction



Multiple Retreads

CT706+ : Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
225/70R19.5	128/126M	14	TL	(S)1800/3970 (D)1700/3750	760/110	6.75	811	226	14.4
245/70R19.5	135/133M	16	TL	(S)2180/4805 (D)2060/4540	830/120	7.50	839	248	15.0

- Lug pattern design provides more traction and superior resistance to irregular wear
- Grooves arranged for excellent grip performance in off-road conditions
- Advanced cut and chip compounds provide anti-abrasion and resistance to cutting and tearing
- Strengthened casing for more retreads