




Recommended Wheel Position



Features

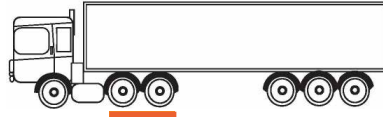

Long Haul Application



Enhanced Mileage



Optimized Handling



Multiple Retreads

CT778+ : Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1060	284	20.6
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	275	20.6
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1116	279	20.6
11R24.5	149/146L	16	TL	(S) 3250/7160 (D) 3000/6610	830/120	8.25	1116	279	20.6
295/75R22.2	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/110	9.00	1014	296	22
295/75R22.2	144/141L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	9.00	1014	296	22

- Designed with three rows of aggressive tread blocks for superior traction and resistance
- Closed shoulder tread design provides long, even wear while providing excellent traction
- Premium tread compound promotes enhanced mileage
- Heavy duty casing provides durability for more retreads