




Recommended Wheel Position



Features

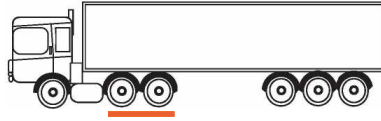

Off Road Application



Enhanced Mileage



Chip Resistant



Extra Traction



Multiple Retreads

CT798+ : Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
325/95R24	162/160K	22	TT	(S)4750/10472 (D)4500/9921	850/123	9.00	1230	314	21.0

- Aggressive block pattern design for excellent handling and traction performance
- Specialized tread compound with improved resistance against cutting, chipping and tearing
- Excellent grip force on mud and snow
- Self-cleaning knobs and stone ejectors